

LT-HS-PTEL05-11

Tactical Noise Cancelling Headset


Specifications

Speaker	
Type	Transducer Moving Coil Dynamic Speaker
Impedance	150 Ω \pm 15% @ 1 KHz
Sensitivity	115 \pm 3 dB / 1 mW @ 1 KHz
Frequency	200 - 4 KHz
Rated Input Power	0.1 W
Maximum Input Power	0.5 W

Microphone	
Type	Transducer Moving Coil Dynamic Microphone
Sensitive Range	-65 \pm 3dB
Impedance Max	150 Ω @ 1 KHz
Frequency	200 - 4 KHz



Environmental Conditions	
Operating Temperature	-30° to +55 °C
Storage Temperature	-40° to +70 °C
Relative Humidity	< 96%
Atmospheric Pressure	86 kPa ~ 106 kPa

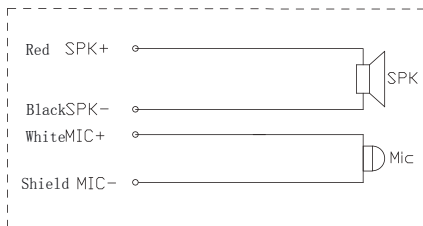

Schematic diagram

